


PERFORMANS TABLOSU / PERFORMANCE TABLE

Motor Tipi Motor Type	Güç Power		Eksenel Yük kN	Voltaj Voltage V	Akım (A) Current (A)		Verim (η%) Efficiency (η%)			Güç Faktörü(COSφ) Power Factor (COSφ)			Devir Rotation (RPM)	Uzunluk Lenght mm	Ağırlık Weight kg
	kW	Hp			I _N	I _A	50%	75%	100%	50%	75%	100%			
JSM 8/40	30	40	45	460	51,0	258	83	83	82	82	86	90	3450	1056	129,0
JSM 8/50	37	50	45	460	61,4	308	85	85	84	82	86	90	3460	1116	138,0
JSM 8/60	45	60	45	460	74,8	382	85	85	84	82	86	90	3460	1201	152,0
JSM 8/70	52	70	45	460	85,3	431	85	85	84	83	87	91	3450	1286	170,0
JSM 8/75	55	75	45	460	90,2	458	85	85	84	83	87	91	3450	1286	170,0
JSM 8/80	60	80	45	460	99,6	509	85	85	84	82	86	90	3450	1341	185,0
JSM 8/90	67	90	45	460	111,2	563	85	85	84	82	86	90	3450	1366	186,0
JSM 8/100	75	100	45	460	123,1	625	85	85	84	82	86	91	3450	1391	195,0
JSM 8/110	81	110	55	460	134,4	681	85	85	84	82	86	90	3430	1471	210,0
JSM 8/125	92	125	55	460	152,8	770	85	85	84	82	86	90	3430	1536	212,0

KABLO ÖLÇÜ TABLOSU / CABLE DIMENSION TABLE

Motor Tipi Motor Type	Max. Eksenel Yük Thrust Force Axiale Kn	Kablo / Cable mm ²			
		Direkt Direct		Yıldız Üçgen Star Delta	
		mm ²	n	mm ²	n
JSM 8/40	45	3 x 10	1	3 x 10	2
JSM 8/50	45	3 x 10	1	3 x 10	2
JSM 8/60	45	3 x 10	1	3 x 10	2
JSM 8/70	45	3 x 16	1	3 x 16	2
JSM 8/75	45	3 x 16	1	3 x 16	2
JSM 8/80	45	3 x 16	1	3 x 16	2
JSM 8/90	45	3 x 16	1	3 x 16	2
JSM 8/100	45	3 x 16	1	3 x 16	2
JSM 8/110	45	3 x 16	2	3 x 16	2
JSM 8/125	45	3 x 16	2	3 x 16	2

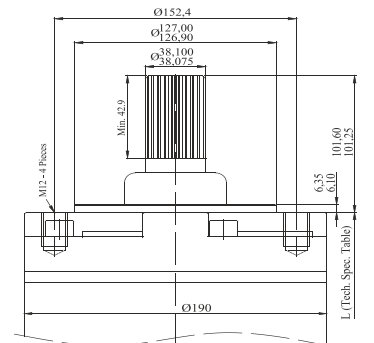

Firmamız teknolojik gelişmeler nedeniyle değişiklik hakkını saklı tutar.

Due to continuous improvement in design we reserve the right to amend specifications or data without prior notice.